


Manual

for Toyota Highlander 2008-2013

Central Control Disassembly and Operation


Post-installation rendering

Wiring diagram

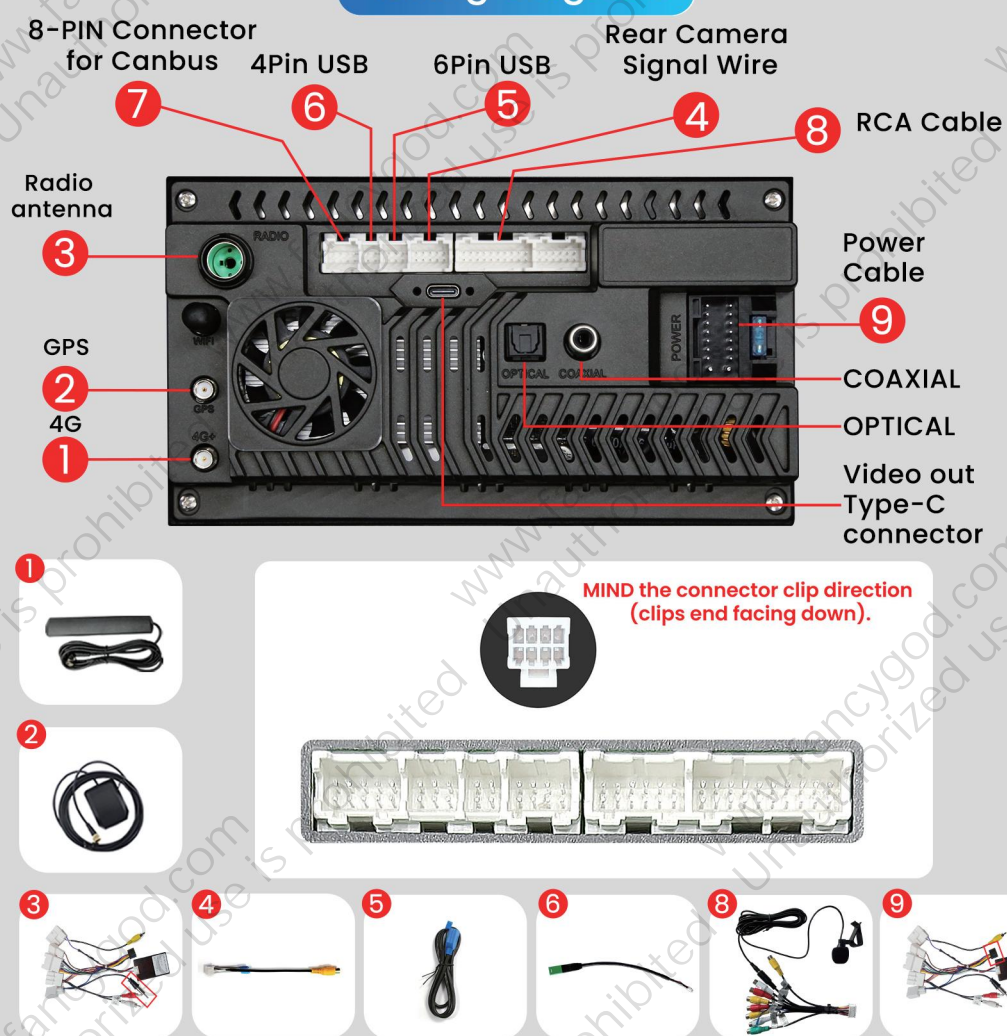


C-Cables XC-1380

Connect the original car harness plug: power/speaker/SWC

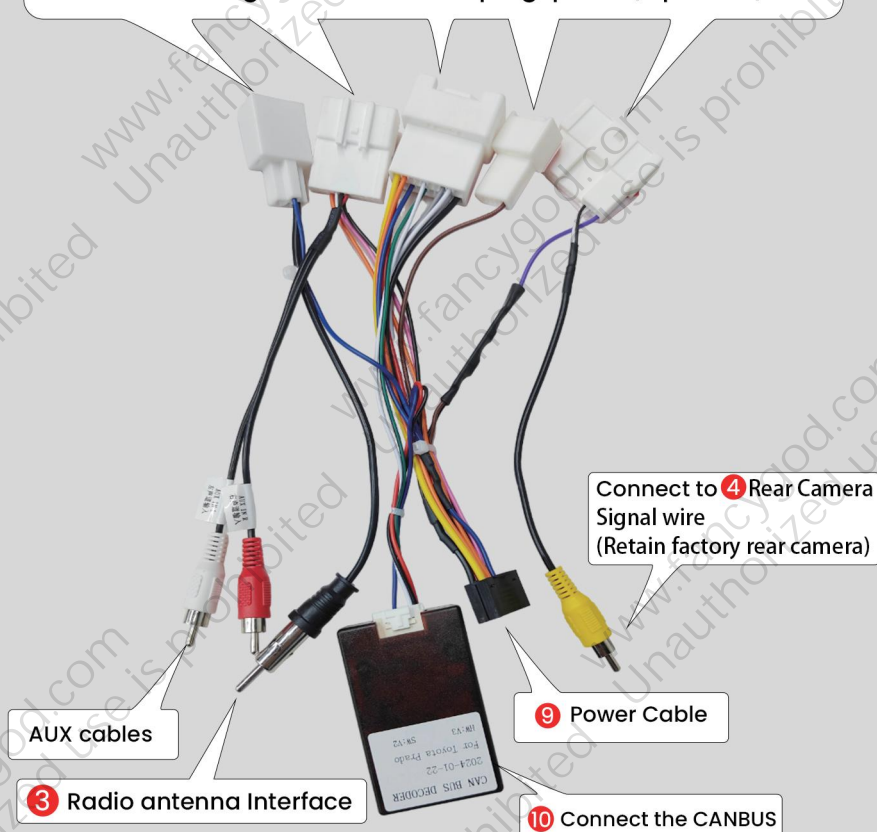


B-Cables XC-392

Connect the original car harness plug: power/speaker/SWC

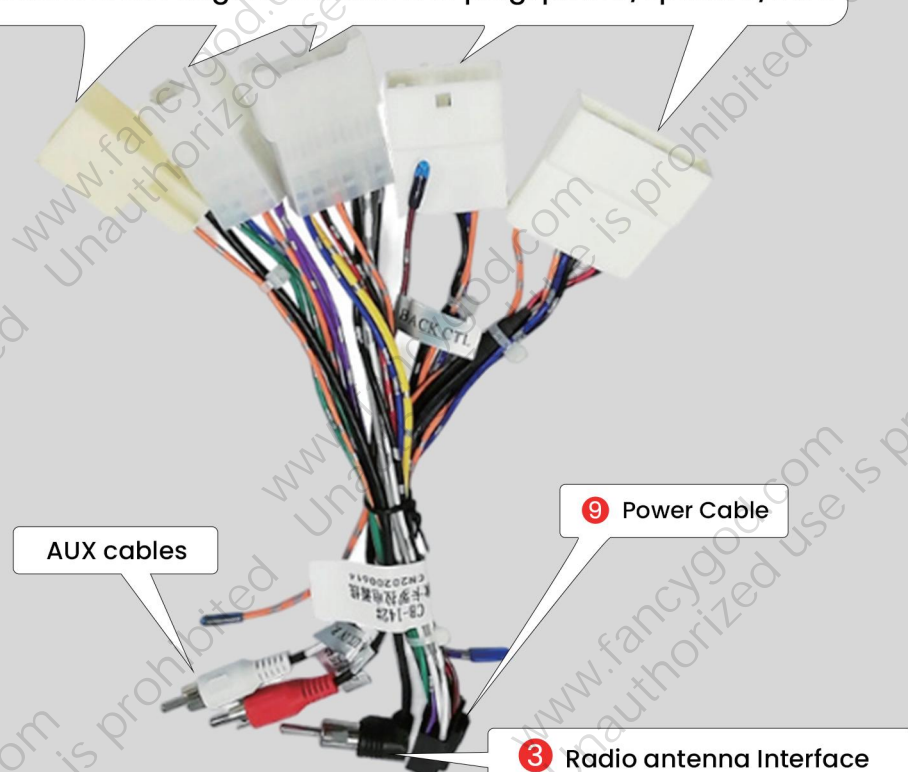

Power Line Definition Chart

Front Left (+)	<input type="checkbox"/>	<input type="checkbox"/>	Rear Right (+)	<input type="checkbox"/>
Front Left (-)	<input type="checkbox"/>	<input type="checkbox"/>	Rear Right (-)	<input type="checkbox"/>
Front Right (+)	<input type="checkbox"/>	<input type="checkbox"/>	Rear Left(+)	<input type="checkbox"/>
Front Right (-)	<input type="checkbox"/>	<input type="checkbox"/>	Rear Left(-)	<input type="checkbox"/>
Steering Wheel Key(+)	<input type="checkbox"/>	<input type="checkbox"/>	Power Antenna(+)	<input type="checkbox"/>
Rear Camera(+)	<input type="checkbox"/>	<input type="checkbox"/>	Steering Wheel Key 2 (+)	<input type="checkbox"/>
Accessory/Ignition(+)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Dimmer/Illumination (+)	<input type="checkbox"/>
Chassis Ground (-)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Constant power supply	<input type="checkbox"/>

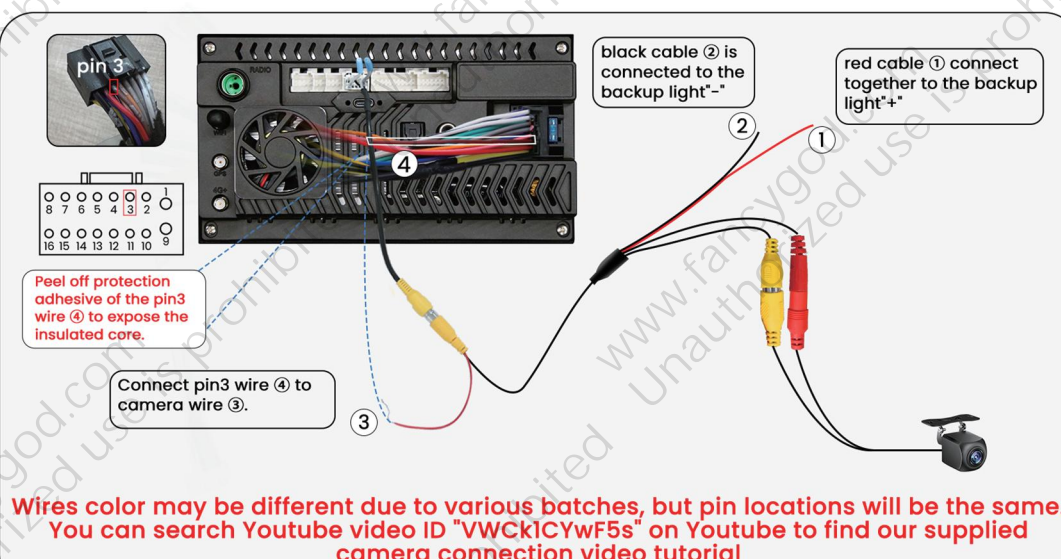

For more guidance/video tutorial, please copy this link or scan the QR code to enter into our official website:

<http://www.fancygod.com>

Instructions




If your factory radio matches the one in image 1, use C-Cables.



If your factory radio matches the one in image 2, use B-Cables.



After connecting the cables, please be sure to follow these steps:
According to image 3, please press Settings → Protocol settings, and set it to "NULL-OTHER -No Protocol-Null."
If your car has steering wheel control buttons, according to image 4, please open the Control app on the radio and refer to the app's instructions to manually learn the steering wheel control keys.
Note: (If you cannot successfully learn the steering wheel control buttons, please contact customer service to obtain the tutorial video)

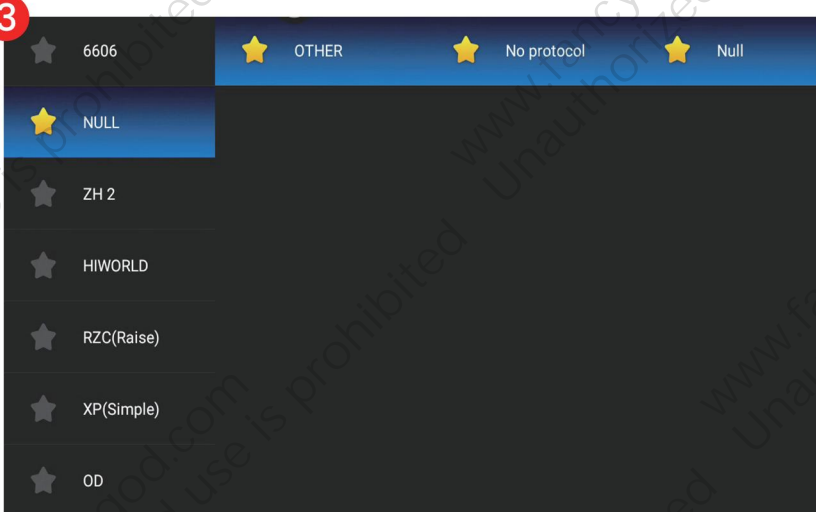

If your front panel buttons of the factory radio match those in image 5, to prevent airbag malfunction warnings, please be sure to connect the hazard light adapter harness as shown in image 6.



FCC warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) this device may not causeharmful interference,and (2) this device must accept any interference received,including interference that may cause undesired operation.