

USE MANUAL

Car Stereo

Honda Accord 8



2008-2012

Central Control Disassembly
and Operation

Post-installation rendering



Wiring diagram

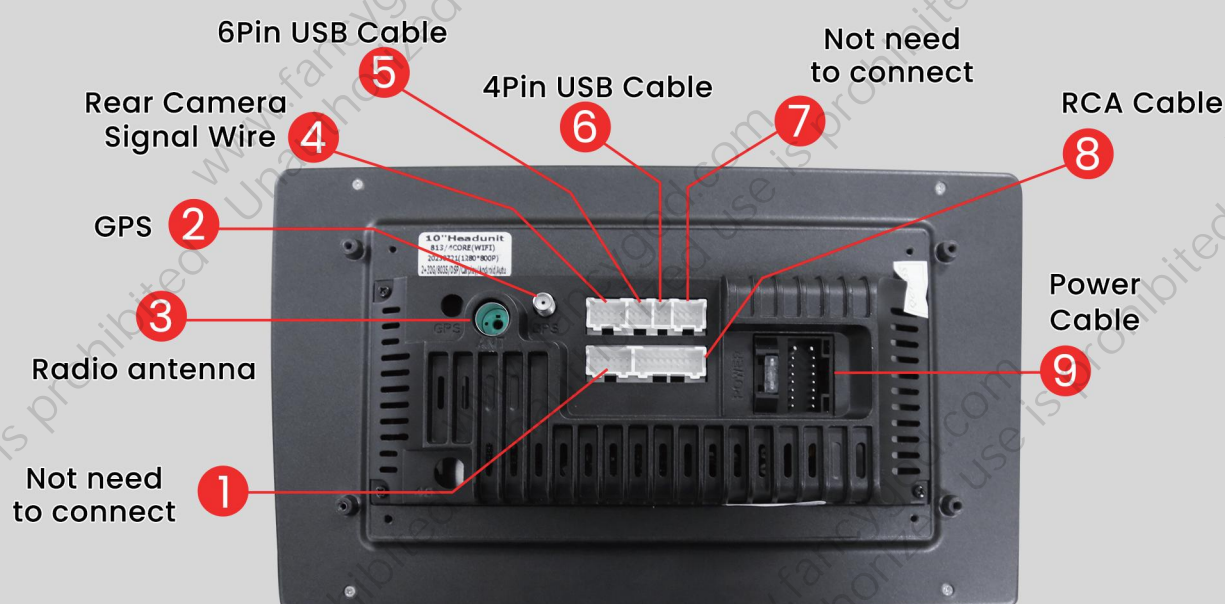


**MIND the connector clip direction
(clips end facing down).**




Original Vehicle Wiring Diagram

Connect the original car harness plug: power/speaker/SWC

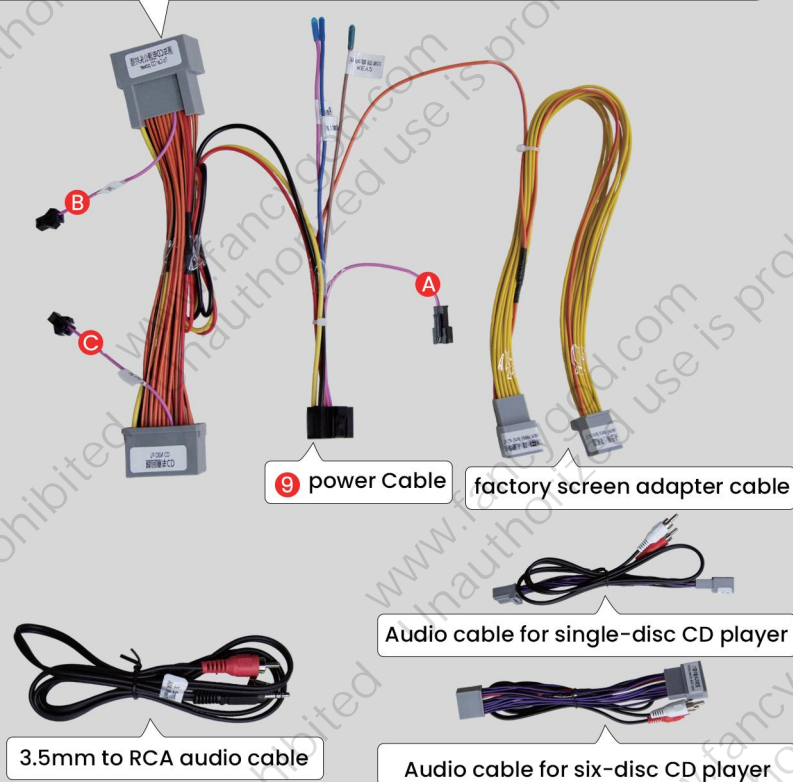

Power Line Definition Chart

Front Left (+)			Rear Right (+)
Front Left (-)			Rear Right (-)
Front Right (+)			Rear Left(+)
Front Right (-)			Rear Left(-)
Steering Wheel Key(+)			Power Antenna(+)
Rear Camera(+)			Steering Wheel Key 2 (+)
Accessory/Ignition(+)			Dimmer/Illumination (+)
Chassis Ground (-)			Constant power supply

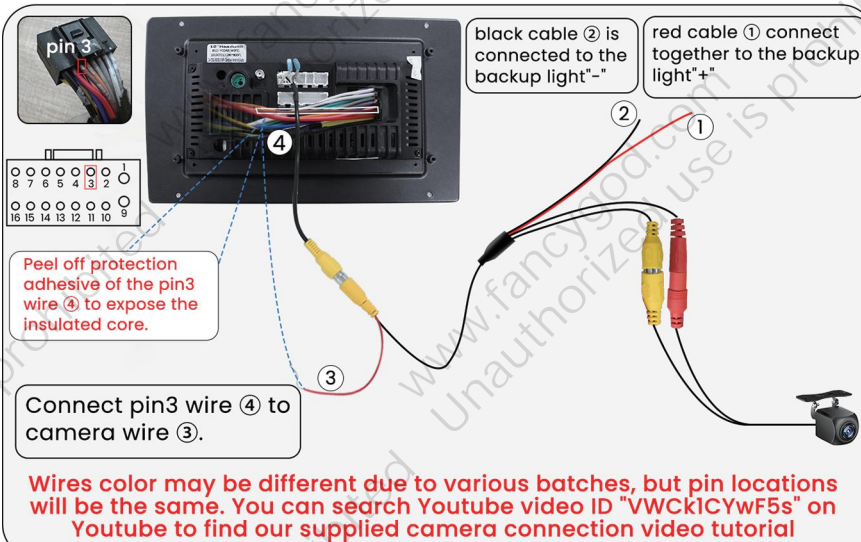



For more guidance/video tutorial, please copy this link or scan the QR code to enter into our official website:

<http://www.fancygod.com>

Instructions



If your car has steering wheel control buttons, please enter Settings-- Factory(input password"3368")
- Car model to choose as NULL--OTHER--No Protocol--Null. Then open the SWC app to manually learn the SWC keys accordingly

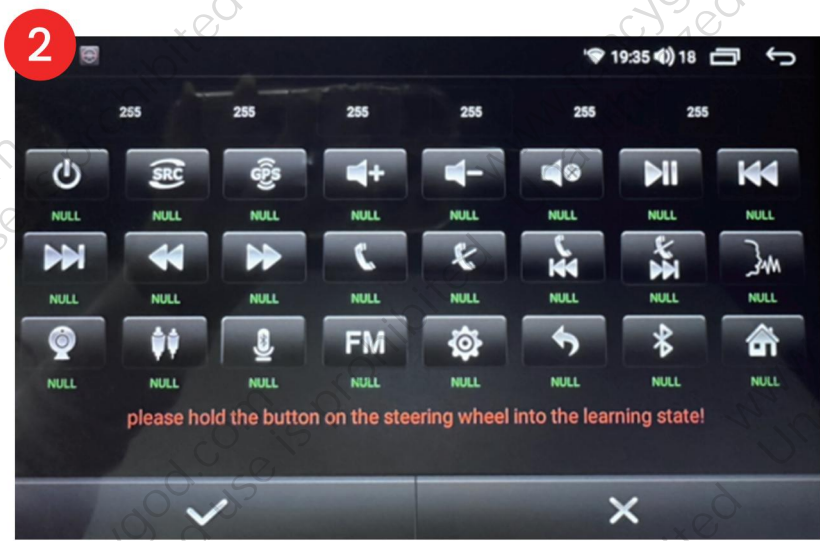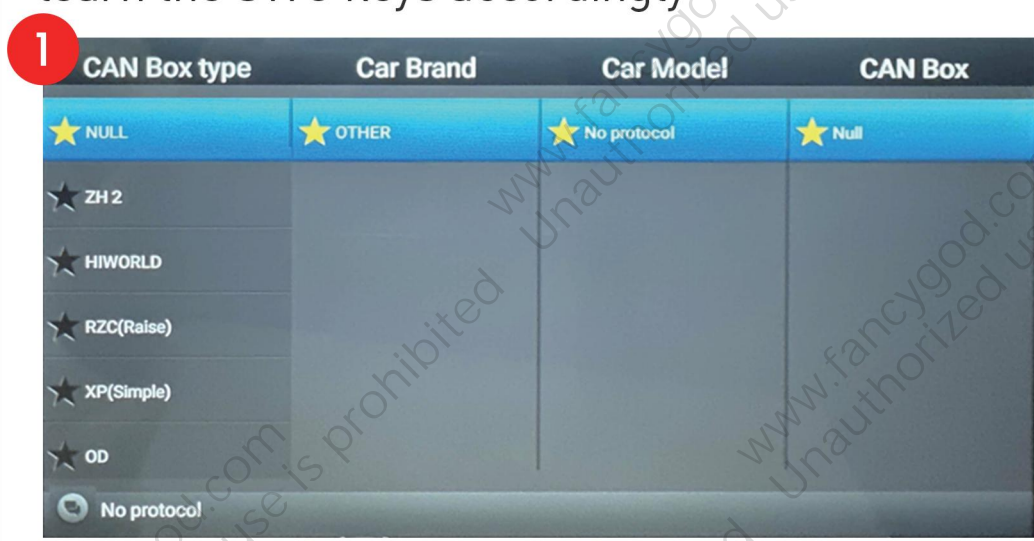

Sound issues : Please use the appropriate harness according to the type of the original CD. Then press the "AUX" button on the original car's control panel for the audio to play from the radio.

If there is still no sound with either harness, please connect the '3.5mm to RCA audio cable' to the 3.5mm AUX port inside the center console.



There are two wiring methods:
Connect the plugA to plugB: the steering wheel controls buttons can control our radio.
Connect the plugA to plugC: the steering wheel controls buttons can control OEM CD player.



FCC warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.